
Play & Leisure Ltd


Installation Details For **Donard Mountain multiplay (M105)**


Component List	Quantity
1.0m H sections	2
0.8m H sections	2
H section post	1
Square platforms	3
Triangular platform	1
0.8m wide slide, holder & foot	1
Access steps	1
Crazy maze play panel	1
Monkey walk riser	1
Platform connector	1
Firepole straight	1
Arch climber	1


- 1 Construct base as per layout drawing 1 ensuring the correct levels for safety surfacing.
- 2 Excavate 400mm x 400mm holes for H sections as in drawing 2 to a depth of 450mm from finished surfacing level. (All H sections have finished ground level marks))
- 3 Connect the H sections to the platforms and place into the excavated holes
- 4 Connect together using the stated links. ie monkey walk riser.
- When all H sections and links have been fitted, level in all directions and check distances from edge of surfacing area
- Mark out for access points as drawing 3 and excavate to a depth of 450 as before (550mm for the slide foot)
- Assemble all other items of equipment as drawing 4 using M10 x 30 resistorx & nylon washers.
- 8 Note. M10 x 25 resistorx are used to connect the slide to the foot
- 9 Connect the panels using M10 x 50 resistorx, steel washers x 2, nyloc & plastic cap sets
- Once all equipment is fitted check levels again, tighten all bolts and concrete into the ground

Note: Do not leave unattended until satisfied the concrete has cured or the site is secure

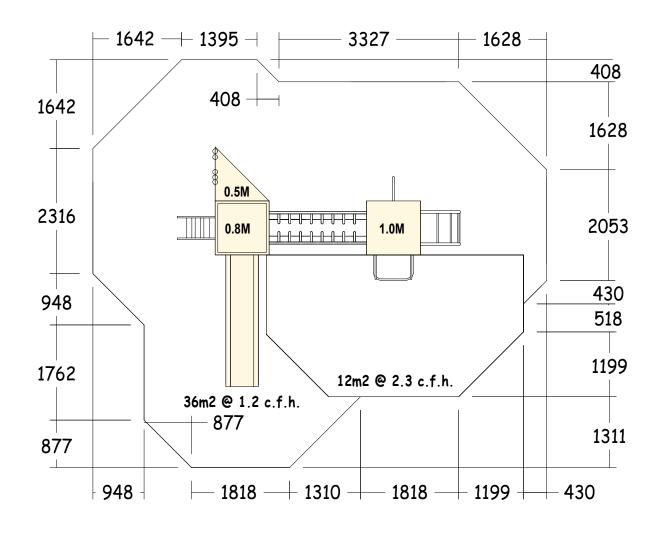

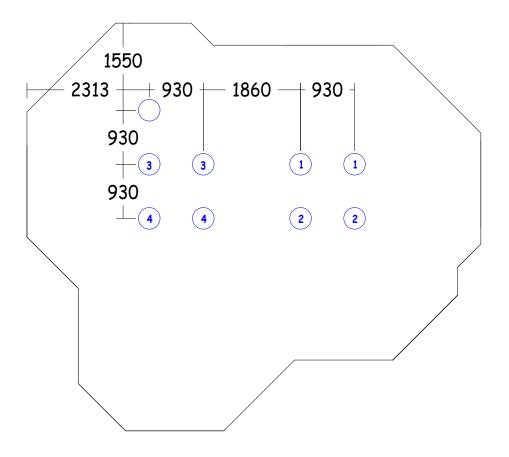

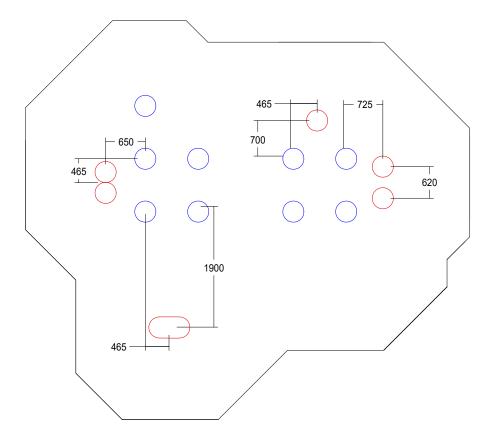

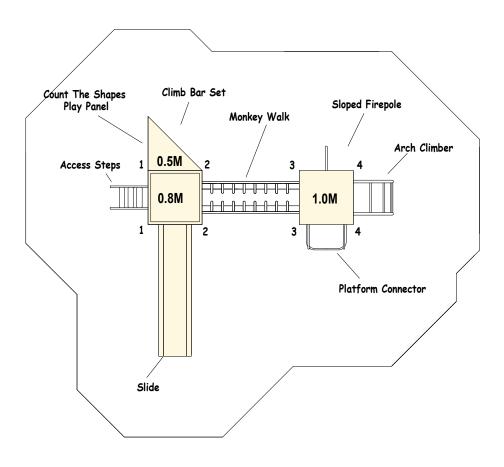

MOUNTAIN - Donard M105















All Play & Leisure's product range is fully compliant with **BS EN 1176**



Features

- Access Steps
- 2 Fireman's Pole
- 3 Platform Connector
- 4 Arch Climber
- Wide Stainless Steel Slide
- 6 Monkey Walk
- 7 Crazy Maze Play Panel

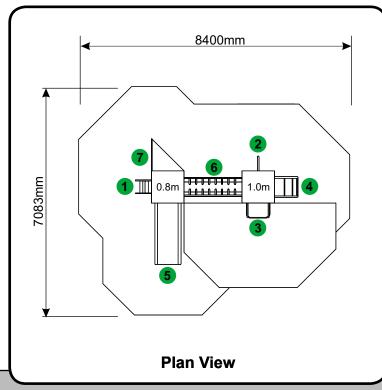

Technical Information

M105 Equiment Size (mm) 5018L x 3880W x 2800H Minimum Space (mm) 8400 x 7083 Free Height of Fall (mm) 1000 & 2300 Safety Surface Area 11m² & 35m² User Age Range
5018L x 3880W x 2800H Minimum Space (mm) 8400 x 7083 Free Height of Fall (mm) 1000 & 2300 Safety Surface Area 11m² & 35m²
Minimum Space (mm) 8400 x 7083 Free Height of Fall (mm) 1000 & 2300 Safety Surface Area 11m² & 35m²
8400 x 7083 Free Height of Fall (mm) 1000 & 2300 Safety Surface Area 11m ² & 35m ²
Free Height of Fall (mm) 1000 & 2300 Safety Surface Area 11m ² & 35m ²
1000 & 2300 Safety Surface Area 11m ² & 35m ²
Safety Surface Area 11m² & 35m²
11m² & 35m²
User Age Range
Osci Age italige
5-12 Years

Play & Leisure Ltd

Maintenance Schedule

Maintenance & Inspection

All Play & Leisure's products should be inspected and maintained in accordance with the recommendations as detailed in BS EN 1176-7:2008

If any part of the equipment is found to be unsafe during an inspection and cannot be immediately rectified the equipment should be protected against further use.

Routine Visual Inspection.

Routine visual inspections are to be conducted to identify obvious hazards resulting from vandalism, use or weather conditions. e.g. Hazards such as broken parts or broken bottles.

Operational Inspection.

To reduce accidents the operator should ensure an appropriate routine maintenance schedule is established, implemented and maintained. Inspection shall be carried out on a monthly basis, although consideration should be taken regarding local conditions and usage.

During a operational inspection the following should be included:

- Tightening of fastenings.
- Re-painting and re-treatment of surfaces.
- Maintenance of any impact attenuating surfaces.
- Lubrication of bearings.
- Marking of equipment to signify loose fill finished surface levels.
- · Cleaning.
- Removal of broken glass and other debris or contaminants.
- Restoring loose fills to the correct level.
- Maintenance of free space areas.

Annual Main Inspection (NOT EXCEEDING 12 MONTHS)

Inspection intended to establish the overall level of safety of equipment, foundation and playing surfaces.

- Effects of weather.
- Rotting or corrosion.
- A change in the level of safety of the equipment as a result of repairs made, or of added or replaced components

One Post Equipment Maintenance.

Special attention should be paid to the stability of products being of a one post design.

Corrective Maintenance.

Corrective maintenance should include measures to correct defects, or to establish the necessary levels of safety of the playground equipment and surfaces. Such measures should include:

- Replacement of fastenings.
- Welding or welding repairs.
- Replacement of worn or defective parts.
- Replacement of defective structural components.

Equipment Alterations.

Alterations to parts of any products that could affect the essential safety of the equipment should only be carried out after consultation with Play and Leisure.

Equipment Identification

Information regarding the manufacturer, I.D. Number, year of manufacturer and the European Standard is displayed on an identification plaque.